

A-1724

PA AMPLIFIER

Equipped with 6 Microphone inputs and 5 AUX inputs (simultaneous use of 9 inputs possible), the A-1724 PA amplifier of 240 W is designed to suit the following PA system applications: announcements, BGM, and broadcasting in mosques, churches, large rooms, and factories.




Order no: A-1724 ER
 Alternative products: A-1803, A-1806, A-1812,
 A-2030, A-2060, A-2120, A-2240

Specifications


Power source	220 - 230 V AC, 50 / 60 Hz
Rated output	240 W
Frequency response	50 Hz - 20 kHz (± 3 dB)
Distortion	< 2 % (at 1 kHz, rated power)
Current consumption	600 mA (or less)
S/N ratio	100 dB (Master volume: min)
Number of channels	1
Connectable microphones	6
Inputs	Mic 1-6 -60 dBV, 600 Ohm, electronically-balanced, combined type of XLR-3-31 equivalent and phone jack AUX 1 - 2: -20 dBV, 600 Ohm, electronically-balanced, combined type of XLR-3-31 equivalent and phone jack . Either MIC 5 or AUX 1, and either MIC 6 or AUX 2 selectable. AUX 3 - 4: -20 dBV, 10 kOhm, unbalanced, RCA pin jack AUX 5: -20 dBV, 10 kOhm, unbalanced, combined type of XLR-3-31 equivalent and phone jack PWR AMP IN: 0 dBV, 600 Ohm, unbalanced, RCA pin jack (An equalizer or other signal processor connectable between LINE OUT and PWR AMP IN terminals)
Outputs	REC: 0 dBV, 600 Ω , unbalanced, RCA pin jack SPEAKER: 100 V (42 Ω), 4 – 16 Ω
Dimensions (W x H x D)	420 x 107,7 x 367 mm
Dimensions (ϕ x D)	x 367 mm
Finish	Steel plate, ABS resin, hairline, black

Appearance

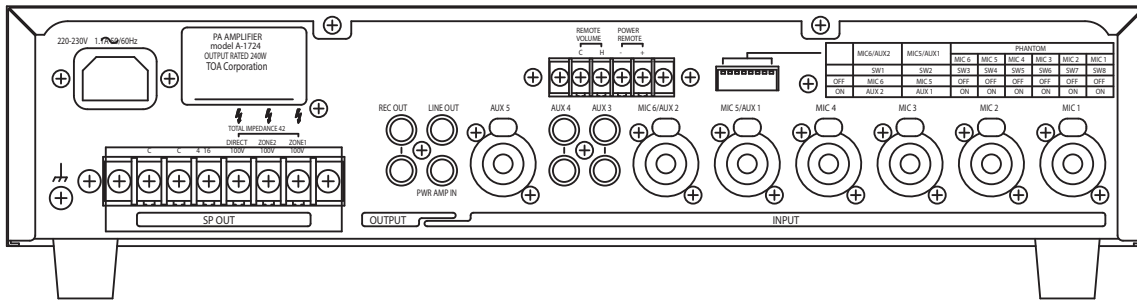


Rear View

420

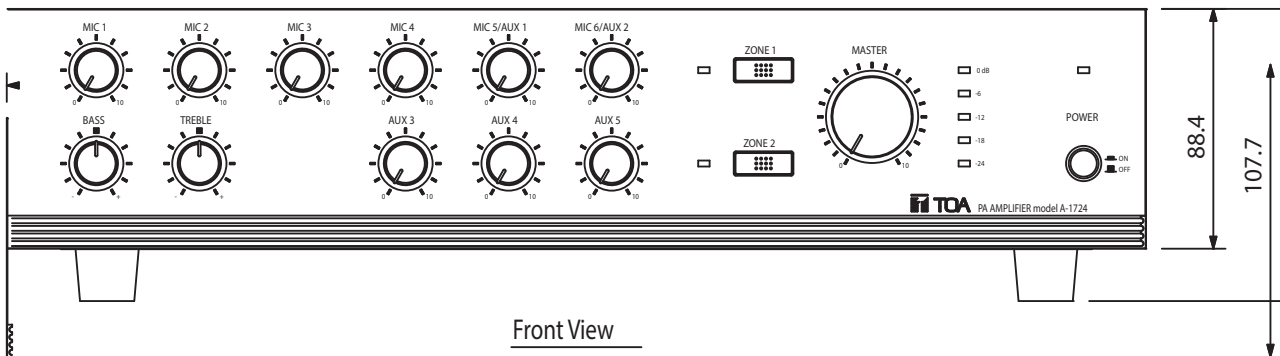

Front View

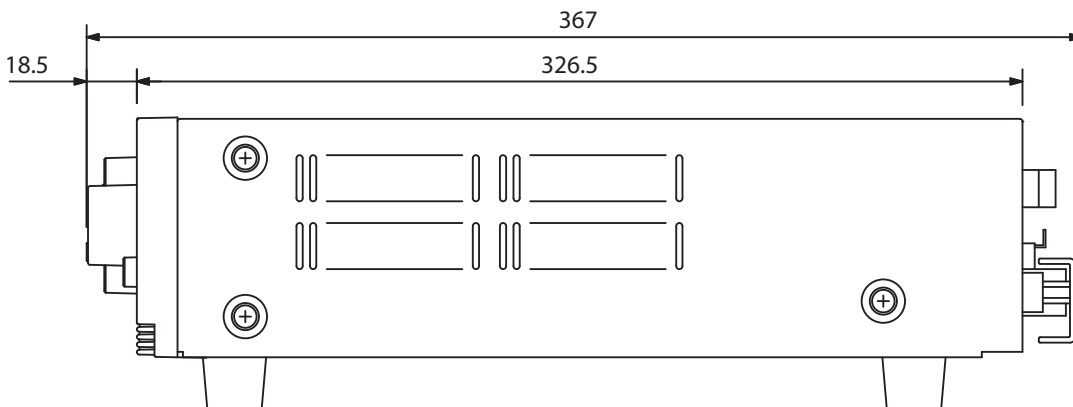

Side View

UNIT:mm SCALE:1/3