

# A-5012

MIXER AMPLIFIER

The A-5012 is a half-rack 1-unit size 120 W desktop mixer power amplifier. Inputs 1 and 2 can be set for either MIC or LINE sound sources, and its output is compatible with both high-impedance (100 V and 70 V lines) and low-impedance (4 #) speaker connections.

Functions can be set with a PC using the dedicated setting software. The A-5012 is ideal for use as a power amplifier in small commercial facilities and conference rooms. With the use of an optional rack mounting bracket, it can be mounted in an EIA Standard equipment rack (1 unit size).



Order no: A-5012 1CE

## Specifications


Power source	100 - 240 V AC, 50 / 60 Hz
Rated output	120 W
Frequency response	50 Hz - 20 kHz (1/8 rated output)
Distortion	< 1 % (at 1 kHz, rated power)
Current consumption	3 A (max.)
S/N ratio	50 dB (MIC 1, 2: 50 dB or more, LINE 1 – 4: 70 dB or more (A-weighted))
Number of channels	1
Connectable microphones	2
Inputs	INPUT 1, 2: MIC -60 dBV, LINE -20 dBV, MIC/LINE selectable 2.2k Ωs, electronically-balanced, removable terminal block (5 pins) INPUT 3, 4: LINE -20 dBV, 10k Ωs, unbalanced, RCA pin jack
Control input	Mute control, Remote master volume control
Outputs	Speaker: 4 Ωs, 70 V (42 Ω) , 100 V (83 Ω),removable terminal block (5 pins)
Dimensions (W x H x D)	210 x 52,5 x 375 mm
Dimensions (ø x D)	x 375 mm
Finish	Polystyrene resin, Steel plate, paint, black

# A-5012


MIXER AMPLIFIER

Appearance


Rear View



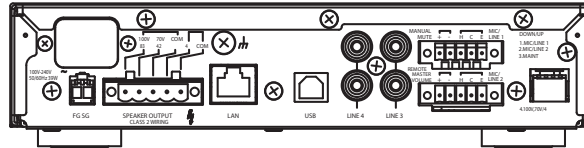


Front View

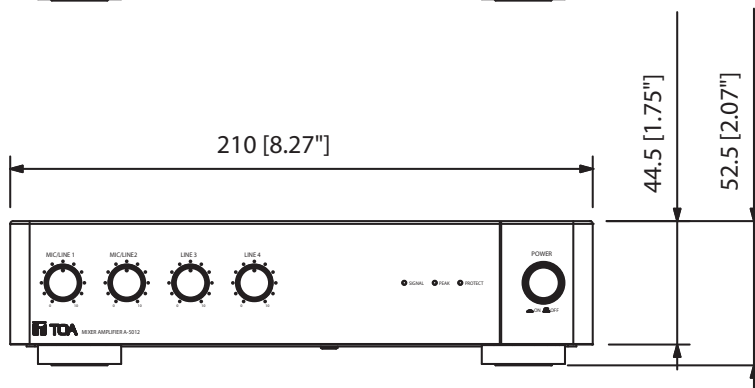

Side View

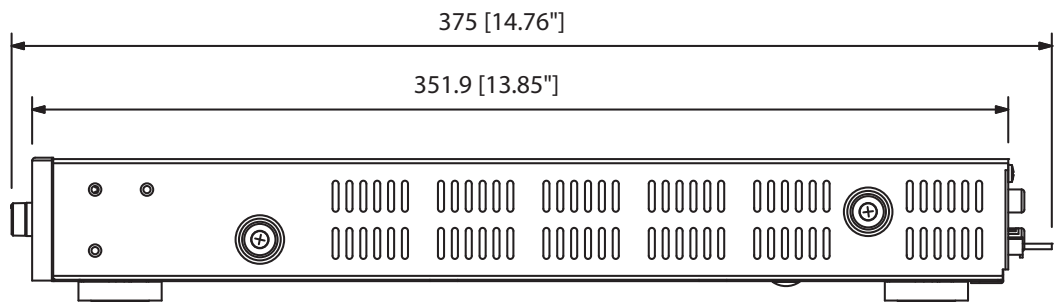

Model	1CE	3CU	4CE
AC plug			

UNIT:mm

SCALE:1/3