

The CS-304 outdoor speaker features stainless steel hardware for all-weather durability. It is designed to offer the high intelligibility of weather-resistant horns combined with the high sound quality of dynamic speakers. The CS-304 employs the rotary switch that facilitates impedance changes. It also employs a constant directivity horn for clear sound output over its horizontal range of 90° operation.




Order no: CS-304 EU

Specifications

Frequency response	120 Hz - 15 kHz
Sensitivity (1#V, 1#n) (combined)	98 dB
Speaker component	12 cm cone-type
Rated input	30 W
Tappings	100V line: 330 Ω (30W), 500Ω (20W), 1kΩ (10W) 70V line: 170Ω (30W), 330Ω (15W), 500kΩ (10W), 1kΩ (5W)
Dimensions (W x H x D)	366 x 230 x 272 mm
Dimensions (ø x D)	x 272 mm
Finish	ABS resin, papyrus white (RAL 9018 or equivalent)

Appearance

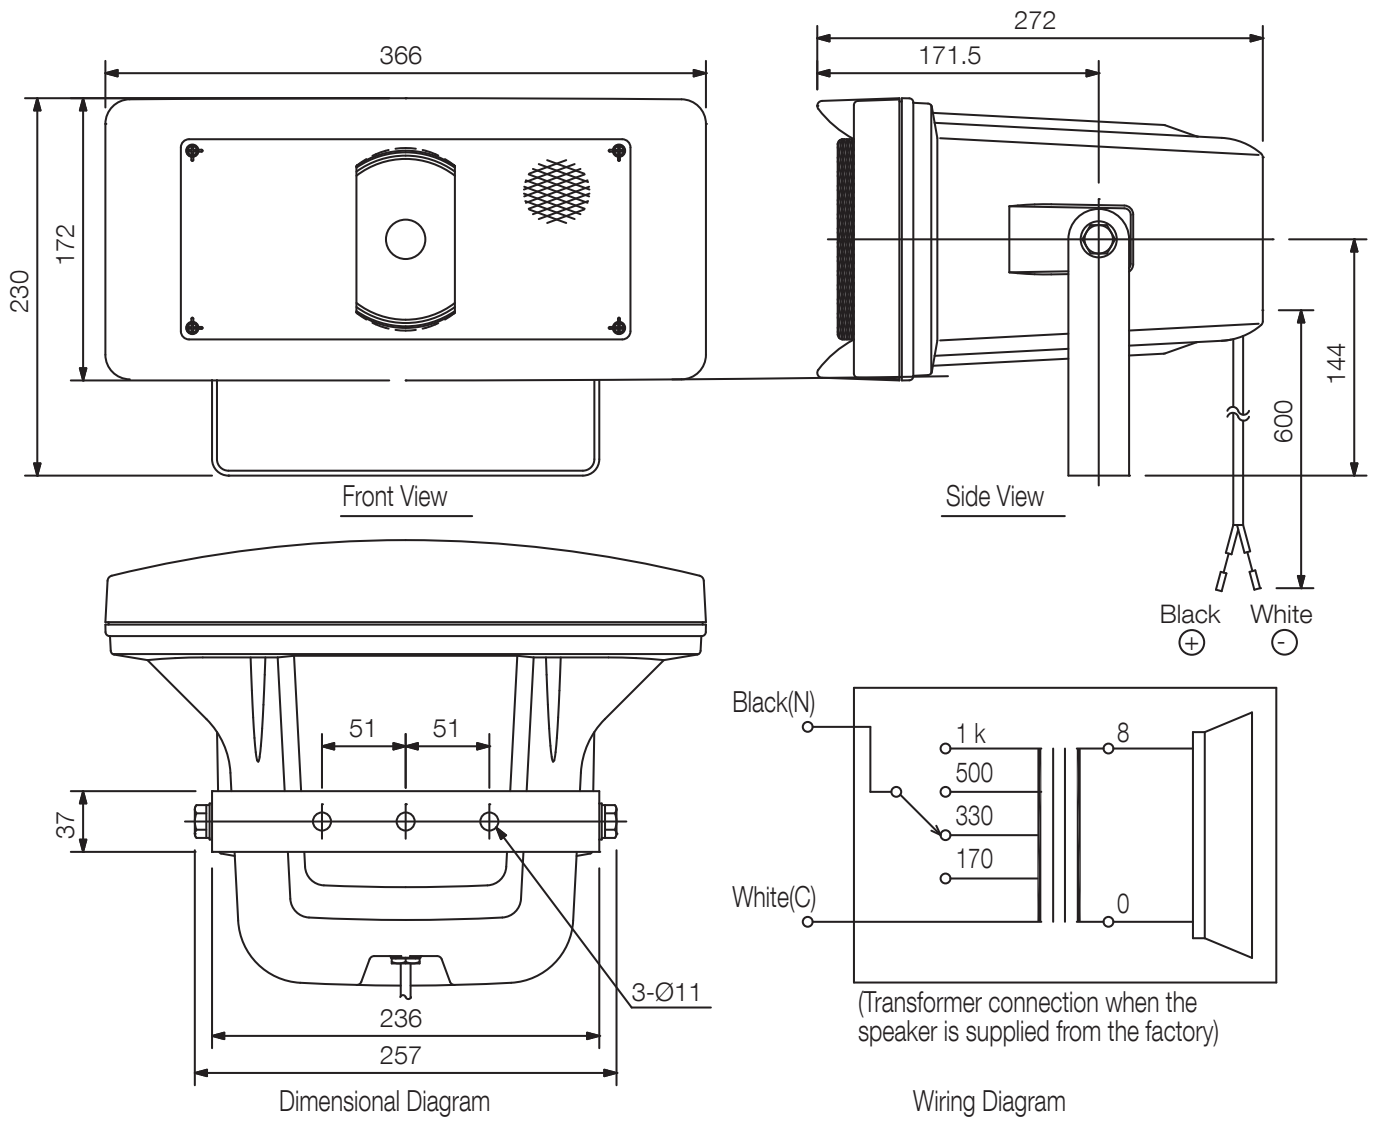

UNIT:mm

SCALE:1/5