

A-2120

MIXER AMPLIFIER

Multi-purpose, multi-function mixer/power amplifiers specifically designed for maximum versatility and cost-effective high-performance are ideal units for any PA requirement in locations such as schools and offices and other intermediate size environments. A choice of different power outputs are offered as well as functions such as paging and dual zone coverage.



Order no: A-2120 CE-GB
 Alternative products: A-1706, A-1712, A-1724,
 A-1803, A-1806, A-1812, A-2030D-EB,
 A-2030DD-EB, A-2060D-EB, A-2060DD-EB,
 A-2120D-EB, A-2120DD-EB, A-2240D-EB,
 A-2240DD-EB


Specifications

Power source	220 - 240 V AC, 50 / 60 Hz
Frequency response	50 Hz - 20 kHz (±3 dB)
Distortion	< 1 % (at 1 kHz, 1/3 rated output power)
S/N ratio	60 dB (or more)
Connectable microphones	3
Inputs	MIC 1: -60dB, 600Ω, electronically balanced, 5-P DIN type MIC 2, 3: -60dB, 600Ω, electronically balanced, phone jack AUX 1, 2: -20dB, 10kΩ, unbalanced, RCA pin jack Mute: Contact Pin 4 – 5, closure input (for MIC 1)
Outputs	Speaker out: 100 V, 70 V, 4 Ω / Recording
Dimensions (W x H x D)	420 x 100,9 x 280,3 mm
Dimensions (ø x D)	x 280,3 mm
Finish	ABS resin, Steel plate, black

A-2120

MIXER AMPLIFIER

Appearance

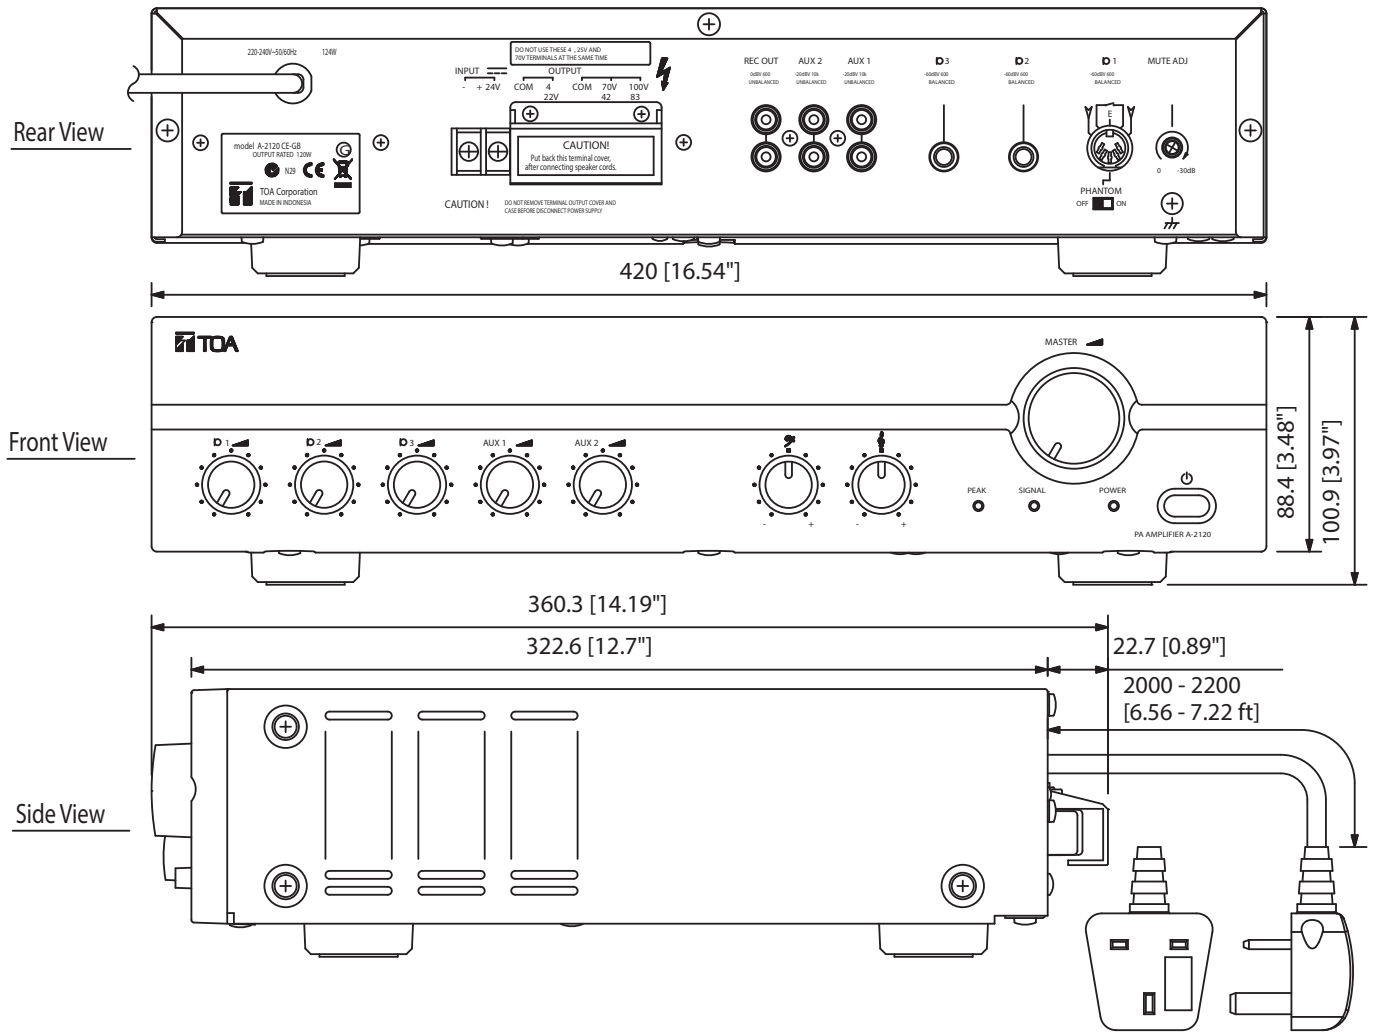

UNIT:mm

SCALE:1/3